



PNEUMATIC IMPACT VIBRATORS P OLI



> SCAN QR CODE
FOR MAINTENANCE
& INSTALLATION
DOCUMENTS

- The OLI P range offers 3 models of strikers with striking forces extending from 954 N and 3250 N.
- The fixing bases are available in 2 and 4 holes to offer all the possible mounting positions.
- Particularly effective for the unclogging and the dérouting of hoppers containing material that is difficult to fluidify.



We reserve the right to change specifications and dimensions without notice.

PNEUMATIC SPECIFICATIONS					
Model	Frequency 6 Bar		Linear Force		Air Consumption
	Vib. /min		KG	N	l/min
P25	4500		97	954	12
P40	2800		142	1396	150
P60	1900		331	3250	300

DIMENSIONS (mm)																
Model	Fig	A	A1	B	C	D	E	E1	F	G	H	P	L	M	N	Weight
	-	-	-	-	-	-	-	-	-	-	-	IN	-	OUT	-	KG
P25	1	92	98	115	85	70	21	27	13	58	30	1/4"	10	1/4"	25	2,2
P40	1	121	127	148	110	91	25	31	17	75	45	3/8"	16	3/8"	35	4,5
P60	2	163	173	138x142	99x99	125	28	38	17	115	60	1/2"	27	2x1/2"	60	11

Fig.1

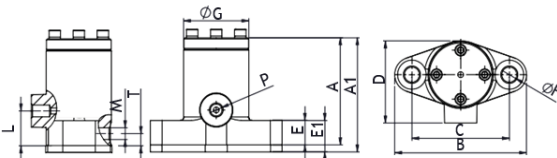


Fig.2

