




PNEUMATIC TURBINE VIBRATORS VT EUROVIBRA



> SCAN QR CODE FOR MAINTENANCE & INSTALLATION DOCUMENTS

- Unique manufacturing allowing to reach the highest amplitudes on the market thanks to its aluminum turbine with additional lead weights.
- Special shovel-shaped turbine profile produces high frequencies and large amplitude movements.
- Also used in the concrete industry to compact the material in molds.

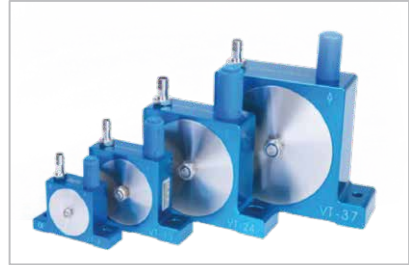

We reserve the right to change specifications and dimensions without notice.

PNEUMATIC SPECIFICATIONS					DIMENSIONS (mm)								
Model	Frequency 6 Bar	Centrifugal Force		Air Consum.	A	B	C	D	E	F	G	K	Weight
	Vib. /min	KG	N	l/min	-	-	-	-	-	-	-	-	KG
VT 7	42 000	146	1440	85	55	90	37	68 à 73	12	1/8	1/8	7	0,31
VT 9	40 000	168	1650	105	55	90	37	68 à 73	12	1/8	1/8	7	0,32
VT 13	24 000	370	3630	180	80	128	49	104	16	1/4	1/4	9	0,75
VT 16	18 500	426	4180	225	80	128	49	104	16	1/4	1/4	9	0,77
VT 17	17 500	507	4980	235	80	128	49	104	16	1/4	1/4	9	0,78
VT 24	9000	634	6220	325	110	170	63	130 to 140	20	3/8	3/8	11	2
VT 31	8000	877	8610	350	110	170	63	130 to 140	20	3/8	3/8	11	2
VT 37	7000	1019	10000	500	140	200	80	170	24	3/8	1/2	11	2,1
VT 50	5500	1386	13600	550	140	200	80	170	24	3/8	1/2	11	2,97

