




SPRING ISOLATORS (LOAD 25<550 Kg.) - M/MB/MBB



> SCAN QR CODE FOR MAINTENANCE & INSTALLATION DOCUMENTS

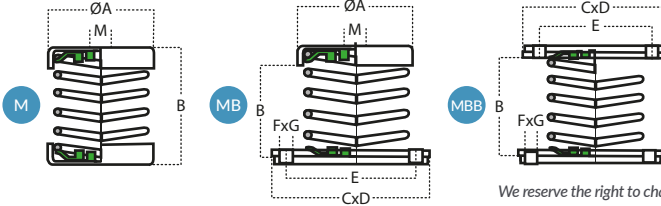

We reserve the right to change specifications and dimensions without notice.

REF	DIMENSIONS								COMPRESSION		RIDGITY
	ØA	B	C	D	E	F	G	M	LOAD	DEFLECTION	
	mm								Kg	mm	Kg./cm
M25	55	79	-	-	-	-	-	8	25	20±2,0	12,5
M50	55	79	-	-	-	-	-	8	50	20±2,0	25
M75	55	79	-	-	-	-	-	8	75	20±2,0	37,5
M100	55	79	-	-	-	-	-	8	100	20±2,0	50
M125	55	79	-	-	-	-	-	8	125	20±2,0	62,5
M150	73	116	-	-	-	-	-	12	150	30±3,0	50
M200	73	116	-	-	-	-	-	12	200	30±3,0	66,67
M250	73	116	-	-	-	-	-	12	250	30±3,0	83,33
M350	73	116	-	-	-	-	-	12	350	30±3,0	116,67
M450	73	116	-	-	-	-	-	12	450	30±3,0	150
M550	73	116	-	-	-	-	-	12	550	30±3,0	183,33
M25B	55	81	90	55	70	10	10	8	25	20±2,0	12,5
M50B	55	81	90	55	70	10	10	8	50	20±2,0	25
M75B	55	81	90	55	70	10	10	8	75	20±2,0	37,5
M100B	55	81	90	55	70	10	10	8	100	20±2,0	50
M125B	55	81	90	55	70	10	10	8	125	20±2,0	62,5
M150B	73	119	110	75	89	11	10	12	150	30±3,0	50
M200B	73	119	110	75	89	11	10	12	200	30±3,0	66,67
M250B	73	119	110	75	89	11	10	12	250	30±3,0	83,33
M350B	73	119	110	75	89	11	10	12	350	30±3,0	116,67
M450B	73	119	110	75	89	11	10	12	450	30±3,0	150
M550B	73	119	110	75	89	11	10	12	550	30±3,0	183,33
M25BB	-	83	90	55	70	10	10	-	25	20±2,0	12,5
M50BB	-	83	90	55	70	10	10	-	50	20±2,0	25
M75BB	-	83	90	55	70	10	10	-	75	20±2,0	37,5
M100BB	-	83	90	55	70	10	10	-	100	20±2,0	50
M125BB	-	83	90	55	70	10	10	-	125	20±2,0	62,5
M150BB	-	120	110	75	89	11	10	-	150	30±3,0	50
M200BB	-	120	110	75	89	11	10	-	200	30±3,0	66,67
M250BB	-	120	110	75	89	11	10	-	250	30±3,0	83,33
M350BB	-	120	110	75	89	11	10	-	350	30±3,0	116,67
M450BB	-	120	110	75	89	11	10	-	450	30±3,0	150
M550BB	-	120	110	75	89	11	10	-	550	30±3,0	183,33

The technical information, diagrams and images present in this document are the exclusive property of Vibraxtion Sarl. Any reproduction is prohibited. This information is non-contractual.