



STAINLESS ELECTRIC MICRO VIBRATOR AMVSS VIBRAMOTORS



DÉVELOPPÉ EN FRANCE

> SCAN QR CODE FOR MAINTENANCE & INSTALLATION DOCUMENTS

- Vibramotors have become the world reference in the pharmacological sector by offering the only stainless steel vibrator in micro format. Electric micro vibrators in 316L stainless steel dedicated to white rooms and highly corrosive or saline environments.
- Range available in triple-phase and single-phase power supply.
- From 39 kg and up to 59 kg of centrifugal force.
- Compact and easy to install thanks to its pre-wired sheath (1.60 m).




\*Contact us to obtain the values in 60 Hz / or in 230 Volts triple-phase. \*\*Working Moment = 2x static moment.

M O N O P H A S E	MECHANICAL SPECIFICATIONS					ELECTRICAL SPECIFICATIONS				
	RPM	Model	Centrifugal Force		Static Moment **	Nominal Voltage	Maximal Current	Capacitor	Maximal Power	Weight
	50 Hz*	Fc /Poles	KG	N	kgmm	V	A	µF	W	KG
	3000	AMVSS 40/2 M	39	383	3,88	230	0,24	4	50	3,7
		AMVSS 60/2 M	59	579	5,86	230	0,24	4	50	3,8
	1500	AMVSS 25/4 M	25	245	9,94	230	0,28	4	58	4,1

DIMENSIONS (mm)																				
Modèle	A	B	C	D	E	E1	E2	F	F1	F2	G	G1	G2	I	L	M	N	P	Cable	Fig.
AMVSS 40/2 M	190	127	85	77	24-40	62-74	60	92	106	85	9	6,5	6,5	47	43,5	10	94	28	M16x1,5	N
AMVSS 60/2 M	190	127	85	77	24-40	62-74	60	92	106	85	9	6,5	6,5	47	43,5	10	94	28	M16x1,5	N
AMVSS 25/4 M	190	127	85	77	24-40	62-74	60	92	106	85	9	6,5	6,5	47	43,5	10	94	28	M16x1,5	N

We reserve the right to change specifications and dimensions without notice.

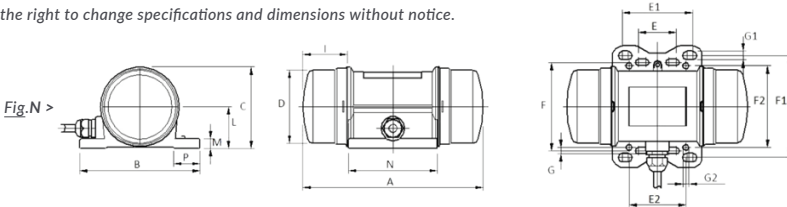

The technical information, diagrams and images present in this document are the exclusive property of Vibraxtion Sarl. Any reproduction is prohibited. This information is non-contractual. Improper use of the equipment cannot engage Vibraxtion Sarl.