



**END OF LIFE PRODUCT**  
REPLACEMENT RECOMMENDED

> SCAN QR CODE FOR MAINTENANCE & INSTALLATION DOCUMENTS


- Specially designed for the concrete and prefabrication industry.
- Possible fixing by bolts or cradles.
- Most often used on molds and on vibrating tables.
- Works perfectly with an electronic frequency converter.



We reserve the right to change specifications and dimensions without notice.

TECHNICAL SPECIFICATIONS					DIMENSIONS (mm)															
Model	Centrifugal Force	Maximal Power	Maximal Current	A	B	C	D	E	F	G	H	I	L	M	N	P	Q	R	Weight	
-	KG	N	Kw	A	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	KG
<b>WITH CRADLES FIXATION</b>																				
HFV 6000/5	540	5296	0.55	10.8	304	190	206	150	86	165	50	13	100	155	18	170	50	40	16	14
HFV 6000/8	864	8473	0.85	16.2	348	220	215	170	95	185	60	17	115	170	20	190	58	48	16	18
HFV 6000/12	1296	12709	1.25	22.9	376	225	235	190	105	202	68	17	120	180	20	196	60	45	16	24.5
HFV 6000/15	1620	15887	1.65	31.5	376	225	235	190	105	202	68	17	120	180	20	196	60	45	16	26
HFV 6000/20	2160	21182	2.00	36.2	415	250	247	202	112	217	82	17	150	190	25	215	56	55	16	40.5
HFV 6000/25	2699	26468	2.25	43.6	415	250	247	202	112	217	82	17	150	190	25	215	56	55	16	42.5
<b>WITH CRADLES FIXATION</b>																				
HFC 6000/12	1200	11767	1,00	18.7	312	242	212	148	95	163	44		84	235					M20	20
HFC 6000/15	1500	14709	1,00	18.7	312	242	212	148	95	163	44		84	235					M20	20.5

Fixation by BOLT

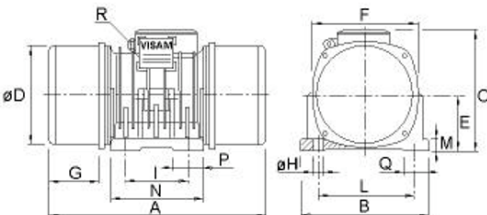

Fixation by CRADLES

