



ELECTRIC VIBRATORS MV 3000 VIBRAMOTORS



ATEX



DEVELOPED IN FRANCE

> SCAN QR CODE FOR MAINTENANCE & INSTALLATION DOCUMENTS

- Industrial vibrators offering the best compatibility with third-party equipment.
- Adjustment of the weight simple and fast thanks to our system exclusive percentage indicator dial. (See Instruction)
- Range available in three-phase and single-phase power supply. From 80 Kg and up to 9 T of centrifugal force.
- Quality performance and craftsmanship for the most competitive price on the market.



\*Contact us to obtain the values in 60 Hz / or in 230 Volts triple-phase. \*\*Working Moment = 2x static moment.

M O N O P H A S E	MECHANICAL SPECIFICATIONS					ELECTRICAL SPECIFICATIONS				
	RPM	Model	Centrifugal Force		Static Moment **	Weight	Nominal Voltage	Maximal Current	Capacitor	Maximal Power
	50 Hz *	Cf /Poles	KG	N	kgmm	KG	V	A	µF	kW
3000		MV 80/2 M	80	785	8	6,2	230	0,3	6	0,1
		MV 120/2 M	120	1177	12	6,6	230	0,35	8	0,1
		MV 200/2 M	200	1962	20	7	230	1,00	6	0,15
		MV 350/2 M	340	3335	34	10,2	230	1,5	8	0,16
		MV 500/2 M	500	4905	50	14,5	230	1,1	8	0,17

DIMENSIONS (mm)													
Model	A	B	C	D	E	ØGx4	H	I	L	M	N	Cable	Fig.
MV 80/2 M	219	156	125	62-74	106	9	62	51,5	113	116	145	M20 x 1,5	1
MV 120/2 M	219	156	125	62-74	106	9	62	51,5	113	116	145	M20 x 1,5	1
MV 200/2 M	219	156	125	62-74	106	9	62	51,5	113	116	145	M20 x 1,5	1
MV 350/2 M	285	175	152	90	125	13	75	66,5	130	152	162	M20 x 1,5	1
MV 500/2 M	247	196	172	95-105	140	13	86	47,5	151	152	191	M20 x 1,5	1

We reserve the right to change specifications and dimensions without notice.

Fig.1

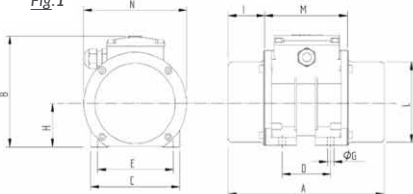


Fig.2

