



ELECTRIC VIBRATORS SPV / SPX A VISAM




ATEX



END OF LIFE PRODUCT  
REPLACEMENT RECOMMENDED

> SCAN QR CODE FOR MAINTENANCE & INSTALLATION DOCUMENTS

- Motors suitable for bridging applications in your hoppers or for removing air bubbles from concrete.
- From 75 kg and up to 9 T of centrifugal force.

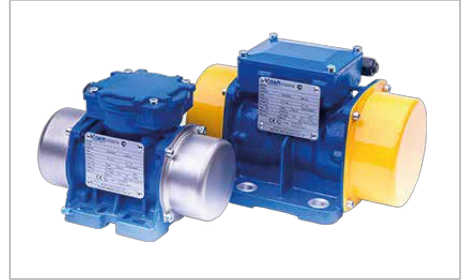

\*Working Moment = 2x static moment.

MECHANICAL SPECIFICATIONS						ELECTRICAL SPECIFICATIONS			
RPM	Model	Centrifugal Force		Static Moment *	Weight	Nominal Voltage	Maximal Current	Connector Type	Maximal Power
50 Hz	-	KG	N	kgmm	KG	V	A	Delta/Wye	kW
T R I P H A S E  3000	SPV 0.7 A	75	735	7,5	4,2	230/400	0,50/0,30	Δ / Y	0,14
	SPV 1.2 A	130	1275	13	4,8	230/400	0,60/0,40	Δ / Y	0,18
	SPV 1.8 A	220	2158	22	5,2	230/400	0,70/0,40	Δ / Y	0,19
	SPV 2.7 A	330	3236	33	9	230/400	1,00/0,60	Δ / Y	0,28
	SPV 4.5 A	500	4903	50	15,5	230/400	1,70/1,00	Δ / Y	0,51
	SPV 7.0 A	800	7845	80	20,5	230/400	2,30/1,30	Δ / Y	0,75
	SPV 9.0 A	1000	9807	100	27	230/400	3,22/1,80	Δ / Y	1,10
	SPV 12.0 A	1350	13239	130	28	230/400	3,70/2,10	Δ / Y	1,30
	SPV 15.0 A	1660	16279	165	33,5	230/400	4,50/2,60	Δ / Y	1,50
	SPX-5 0 19.0 A	2000	19613	200	46	230/400	5,00/2,80	Δ / Y	1,90
	SPX-5 0 25.0 A	2700	26478	270	61	230/400	6,20/3,60	Δ / Y	2,20
	SPX-5 0 32.0 A	4200	41188	415	100,5	230/400	10,00/5,80	Δ / Y	3,50
	SPX-5 0 50.0 A	5630	55211	560	130	230/400	14,00/8,00	Δ / Y	5,00
	SPV 60.0 A	6640	65116	660	182,5	230/400	20,00/11,50	Δ / Y	7,00
SPV 70.0 A	7600	74530	750	210	230/400	22,50/13,00	Δ / Y	8,00	
SPV 85.0 A	9550	93653	950	216	230/400	25,00/14,50	Δ / Y	9,00	

We reserve the right to change specifications and dimensions without notice.

The technical information, diagrams and images present in this document are the exclusive property of Vibraxtion Sarl. Any reproduction is prohibited. This information is non-contractual. Improper use of the equipment cannot engage Vibraxtion Sarl.



ELECTRIC VIBRATORS SPV / SPX A VISAM

\*\*+TH = Cable clamp for thermistor connection.

DIMENSIONS (mm)																
Model	Fig.	A	B	C	D	E	G	Nr.	H	I	L	M	N	P	Q	Cable Gland
SPV 0.7 A	1	195	128	121	79	45	44	4	9	62	95-106	9	100	40	32	M16x1,5
SPV 1.2 A	1	215	152	143	106	62	50	4	9	62-74	106	12	100	35	40	M16x1,5
SPV 1.8 A	1	215	152	143	106	62	50	4	9	62-74	106	12	100	35	40	M16x1,5
SPV 2.7 A	1	262	160	175	126	72	56	4	13	90	125	15	145	55	50	M16x1,5
SPV 4.5 A	1	292	194	204	148	86	44	4	13	100	155	18	180	50	45	M20x1,5
SPV 7.0 A	1	336	220	213	168	96	54	4	17	115	170	20	200	65	50	M20x1,5
SPV 9.0 A	1	366	225	233	187	105	62	4	17	120	180	20	210	70	50	M20x1,5
SPV 12.0 A	1	366	225	233	187	105	62	4	17	120	180	20	210	70	50	M20x1,5
SPV 15.0 A	1	403	250	246	200	112	75	4	17	150	190	22	220	60	60	M20x1,5
SPX-5 0 19.0 A	1	410	280	258	212	117	74	4	17	160	200	30	260	95	80	M20x1,5
SPX-5 0 25.0 A	1	512	300	280	237	131	105	4	22	165	230	35	300	115	80	M20x1,5
SPX-5 0 32.0 A	1	568	330	331	270	150	104	4	25	165	270	35	360	150	90	M25x1,5+ M16x1,55 **
SPX-5 0 50.0 A	1	609	355	360	308	166	110	4	29	210	295	35	390	165	100	M25x1,5+ M16x1,55 **
SPV 60.0 A	2	656	390	392	345	193	121	6	29	110	310	41	350	110	90	M25x1,5+ M16x1,55 **
SPV 70.0 A	2	686	390	414	345	192	121	6	29	115	320	45	370	115	75	M25x1,5+ M16x1,55 **
SPV 85.0 A	2	672	390	414	345	192	121	6	29	115	320	45	370	115	75	M25x1,5+ M16x1,55 **

We reserve the right to change specifications and dimensions without notice.

